

The FG Wilson sound attenuated enclosures for the range of Perkins powered P300P1 to P450E1 generating sets are a result of continuing research and development by our specialist acoustic engineers. **These enclosures reduce sound levels to comply with the new European Community regulations 2000/14/EC which became effective on 1 January 2002.**

The fully weatherproof enclosures incorporate internally mounted exhaust silencers and are of extremely rugged construction in order to withstand the rough handling common on many construction sites. They are designed on modular principles with many interchangeable components permitting on-site repair.

#### Robust/Highly Corrosion Resistant Construction

- ▶ Black finish stainless steel locks and hinges
- ▶ Zinc plated or stainless steel fasteners
- ▶ Body made from steel components treated with polyester powder coating

#### Excellent Access for Maintenance

- ▶ Two large doors on each side
- ▶ Radiator fill access plate
- ▶ Lube oil and cooling water drains piped to exterior of the enclosure

#### Security and Safety

- ▶ Control panel viewing window in a lockable access door
- ▶ Emergency stop push button (red) mounted on enclosure exterior
- ▶ Cooling fan and battery charging alternator fully guarded
- ▶ Fuel fill and battery can only be reached via lockable access doors
- ▶ Exhaust silencing system totally enclosed for operator safety

#### Transportability

- ▶ Tested and certified single point lifting facility
- ▶ Lifting points on baseframe

#### Optional Features

- ▶ Oil field type skid with dragging points and fork lift truck pockets



## 300 - 450 kVA Range




## Modular Acoustic Enclosure



| Sound Pressure Levels (dBA) |     |              |           |             |           |            |           |              |           |             |           |            |           |
|-----------------------------|-----|--------------|-----------|-------------|-----------|------------|-----------|--------------|-----------|-------------|-----------|------------|-----------|
| Generating Set Model        | LWA | 50 Hz        |           |             |           |            |           | 60 Hz        |           |             |           |            |           |
|                             |     | 15 m (50 ft) |           | 7 m (23 ft) |           | 1 m (3 ft) |           | 15 m (50 ft) |           | 7 m (23 ft) |           | 1 m (3 ft) |           |
|                             |     | 75% Load     | 100% Load | 75% Load    | 100% Load | 75% Load   | 100% Load | 75% Load     | 100% Load | 75% Load    | 100% Load | 75% Load   | 100% Load |
| P300P1                      | 98  | 63.4         | 63.4      | 69.4        | 69.4      | 78.9       | 78.9      | 66.2         | 66.2      | 72.2        | 72.2      | 83.2       | 83.2      |
| P330E1                      | 98  | 63.4         | 63.4      | 69.4        | 69.4      | 78.9       | 78.9      | 66.2         | 66.2      | 72.2        | 72.2      | 83.2       | 83.2      |
| P350E1                      | 98  | 63.4         | 63.4      | 69.4        | 69.4      | 78.9       | 78.9      | 66.2         | 67.8      | 72.2        | 73.8      | 83.2       | 84.4      |
| P350P1                      | 98  | 63.4         | 63.4      | 69.4        | 69.4      | 78.9       | 78.9      | 66.2         | 67.8      | 72.2        | 73.8      | 83.2       | 84.4      |
| P380E1                      | 98  | 63.4         | 64.7      | 69.4        | 70.7      | 78.9       | 79.7      | 66.2         | 67.8      | 72.2        | 73.8      | 83.2       | 84.4      |
| P400E1                      | 98  | 63.4         | 64.7      | 69.4        | 70.7      | 78.9       | 79.7      | 66.2         | 67.8      | 72.2        | 73.8      | 83.2       | 84.4      |
| P400P1                      | 98  | 63.4         | 64.7      | 69.4        | 70.7      | 78.9       | 79.7      | 66.2         | 67.8      | 72.2        | 73.8      | 83.2       | 84.4      |
| P440E1                      | 98  | 63.4         | 65.7      | 69.4        | 71.7      | 78.9       | 81.5      | 66.2         | 68.3      | 72.2        | 74.3      | 83.2       | 83.4      |
| P450E1                      | 98  | 63.4         | 65.7      | 69.4        | 71.7      | 78.9       | 81.5      | 66.2         | 68.3      | 72.2        | 74.3      | 83.2       | 83.4      |

Levels in accordance with European Noise Directive (2000/14/EC)

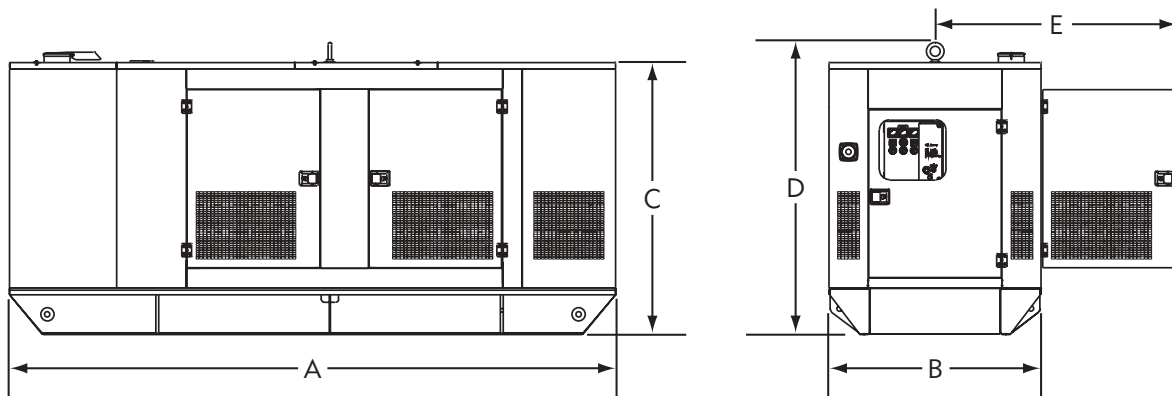

| Dimensions and Weights |              |             |             |             |             |                  |
|------------------------|--------------|-------------|-------------|-------------|-------------|------------------|
| Generating Set Model   | A: mm (in)   | B: mm (in)  | C: mm (in)  | D: mm (in)  | E: mm (in)* | Weight: kgs (lb) |
| P300P1/P330E1          | 4560 (179.5) | 1600 (63.0) | 2050 (80.7) | 2200 (86.6) | 1810 (71.3) | 4675 (10308)     |
| P350E1                 | 4560 (179.5) | 1600 (63.0) | 2050 (80.7) | 2200 (86.6) | 1810 (71.3) | 4600 (10143)     |
| P350P1/P380E1          | 4560 (179.5) | 1600 (63.0) | 2050 (80.7) | 2200 (86.6) | 1810 (71.3) | 4600 (10143)     |
| P400E1                 | 4560 (179.5) | 1600 (63.0) | 2050 (80.7) | 2200 (86.6) | 1810 (71.3) | 4740 (10452)     |
| P400P1/P440E1          | 4560 (179.5) | 1600 (63.0) | 2050 (80.7) | 2200 (86.6) | 1810 (71.3) | 4740 (10452)     |
| P450E1                 | 4560 (179.5) | 1600 (63.0) | 2050 (80.7) | 2200 (86.6) | 1810 (71.3) | 4890 (10782)     |

Weight with lube oil, no coolant, no fuel.

\* Clearance required on both sides



**FG Wilson (Engineering) Ltd**  
 Old Glenarm Road, Larne, County Antrim BT40 1EJ  
 Northern Ireland, United Kingdom  
 Tel: +44 (0) 28 2826 1000 Fax: +44 (0) 28 2826 1111  
[www.FGWilson.com](http://www.FGWilson.com)

